

11-24-00

11/22/00  
JC715 U.S. PTO

A  
JC957 U.S. PTO  
09/721264  
11/22/00

IN THE UNITED STATES PATENT AND TRADEMARK

Box New Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Attorney's Docket No.: SJO990197US1

FILING TRANSMITTAL

Transmitted herewith for filing is the Patent Application of : Pocker et al.


For: "ENERGY GRADIENT ION BEAM DEPOSITION OF CARBON OVERCOATS  
ON RIGID DISK MEDIA FOR MAGNETIC RECORDINGS"

ENCLOSURES

- ☒ 19 page application including specification, claims and abstract;
  - ☒ 2 sheets (Figs. 1 - 6) of ☒ informal/☐ formal drawings;
  - ☒ A Declaration, Power of Attorney & Petition (☐ signed/☐ unsigned);
  - ☒ A postcard for return to us as proof of receipt of the referenced documents.
- and
- ☒ An Assignment of the invention with an assignment cover sheet;
  - ☐ Verified Statement Claiming Small Entity Status (37 CFR 1.9(f) and 1.27(b));
  - ☒ IDS (form PTO-1449) and copies of references;
  - ☐ An Associate Power of Attorney;
  - ☐ A certified copy of the priority document (Under 35 USC 119);
  - ☐ A Power of Attorney by Assignee;
  - ☐ Other.

TYPE OF FILING

- ☐ This application claims the benefit of an earlier filed U.S. Patent Application (35 USC 120).
- ☐ This application claims the benefit of the priority date of an earlier filed provisional patent application (35 USC 119).
- ☐ This is an application filed pursuant to 37 CFR 1.53, permitting receipt of a filing date upon filing of specification, claims and drawings, if required, with applicant being given a period of one month from the date of notice to file the fee and oath or declaration.
- ☒ In the event any parts of this application are missing, please treat this as a filing under 37 CFR 1.53 as defined just above.

<b>CERTIFICATE OF MAILING (37 CFR 1.10(A))</b>	
CERTIFICATE OF MAILING BY "EXPRESS MAIL" - Rule 10: I hereby certify that this correspondence is being deposited with the U. S. Postal Service "Express Mail Post Office to Addressee" under 37 CFR 1.10 as Express Mail No. EL654882455US addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231 on November 21, 2000 by Patricia Beilmann.	
Date: November 21, 2000	 Patricia Beilmann

## FEE CALCULATION

The filing fee has been calculated as shown below:

				SMALL ENTITY	OR	OTHER THAN A SMALL ENTITY	
BASIC FEE Design Patent				\$160	\$	\$320	\$
BASIC FEE Utility Patent				\$355	\$	\$710	\$710
EXTRA FEES				RATE	FEE	RATE	FEE
Total claims	26	minus 20 =	6	x9 =	\$0	x18 =	\$108
Independent Claims	4	minus 3 =	1	x40 =	\$0	x80 =	\$80
<input type="checkbox"/> Multiple Dep. Claim				+130 =	\$	+260 =	\$
<input checked="" type="checkbox"/> Assignment				+40 =	\$	+40 =	\$40
<input type="checkbox"/> Rule 53 Surcharge				+65 =	\$	+130 =	\$
<b>TOTAL</b>					\$		\$938

### FEE PAYMENT


- ☒ Attached is Check No. 124677 in the sum of \$938.00 to cover the filing fee.
- ☐ Please charge Account No. 02-3964 the sum of \$\_\_\_\_\_

### FEE DEFICIENCY

- ☐ Please charge Account No. 02-3964 in the sum of \$\_\_\_\_\_
- ☐ The Commissioner is authorized to charge (or credit any overpayment) to deposit account No. 02-3964:
- ☐ Any additional filing fees required under 37 CFR 1.16, except Rule 53 filings, which will be paid within the time permitted by PTOL 1533.
  - ☐ Assignment Recordal fees.
- ☒ The filing fee and surcharge under 37 CFR 1.16, patent application processing fees under 37 CFR 1.17 and patent issue fees under 37 CFR 1.18 are intended to be paid by our firm as they arise. As no abandonment is intended by any inadvertent nonpayment of fees, the Commissioner is hereby authorized to charge payment of such fees as from time to time come due, if not paid prior to due date to our Deposit Account No. 02-3964.
- ☐ A duplicate copy of this sheet is enclosed.

Dated: November 21, 2000

Respectfully submitted,



ROBERT O. GUILLOT

Reg. No: 28,852

OPPENHEIMER WOLFF & DONNELLY LLP  
 Customer No. 25696  
 1400 Page Mill Road  
 Palo Alto, CA 94304  
 Tel: (650) 320-4000

## Specification

# ENERGY GRADIENT ION BEAM DEPOSITION OF CARBON OVERCOATS ON RIGID DISK MEDIA FOR MAGNETIC RECORDINGS

## BACKGROUND OF THE INVENTION

### 5 Field of the Invention:

The present invention relates generally to protective layers fabricated upon magnetic layers of hard disk media, and more particularly to thin film diamond-like carbon protective layers.

### Description of the Prior Art:

10 Standard magnetic media hard disks include a magnetic layer that is covered by a protective overcoat layer. The overcoat layer is necessary to provide both mechanical and corrosion protection for the magnetic layer, and typical prior art overcoat layers are composed of a hard, carbon based composition that is applied by a magnetron sputtering technique to a thickness of approximately 50 to 200 Å.

15 The ongoing efforts to increase the areal data storage density of magnetic disks have resulted in a need to reduce the thickness of the overcoat layer while increasing the hardness, or density of the overcoat layer. It has been found that a typical magnetron sputtered overcoat of below approximately 50 Å is not sufficiently hard, nor does it provide sufficient corrosion protection to the magnetic layer, due to the generally low energy (approximately 10 eV) at which  
20 the carbon atoms are deposited. Efforts to create a thin, hard, corrosion resistant overcoat have therefore been directed towards fabrication devices such as mass selected ion beam deposition (MSIB), cathodic arc, laser plasma deposition and plasma enhanced chemical vapor deposition

(PECVD) which produce carbon atom deposition energies of 100 eV or more. While such 100 eV deposited overcoat layers provide good mechanical and corrosion resistance properties, they also create deterioration problems for the underlying magnetic layer. Specifically, at such high energies, the carbon atoms, as well as other atoms such as nitrogen and hydrogen that are often  
5 utilized in forming the overcoat layer, become implanted into the magnetic layer to a significant depth. The implanted atoms can seriously degrade the magnetic properties of the magnetic layer within its upper regions, thus resulting in degraded performance of a magnetic disk that is fabricated with an overcoat layer formed with prior art high energy carbon deposition techniques.

The present invention solves these prior art problems through the use of an energy  
10 gradient ion beam deposition technique in which the implanting of carbon overcoat ions into the magnetic layer is reduced.

### SUMMARY OF THE INVENTION

In the energy gradient ion beam deposition technique of the present invention, the fabrication of the overcoat layer starts with a low energy ion beam to avoid magnetic layer  
15 implantation problems, followed by higher deposition energies where the higher energy atoms are implanted into the previously formed lower energy overcoat layer, rather than the magnetic layer. The energy gradient ion beam deposition process therefore results in a thin overcoat layer that is denser than a comparable layer formed by low energy magnetron sputtering, and which overcoat layer provides good mechanical and corrosion protection to the magnetic layer, without  
20 degrading the magnetic properties of the magnetic layer. Where a magnetic media hard disk of the present invention is utilized within a hard disk drive, the thinner overcoat layer allows the magnetic head of the disk drive to fly closer to the magnetic media layer, thereby facilitating an increase in the areal data storage density of the hard disk drive.

It is an advantage of the magnetic media hard disk of the present invention that it is fabricated with a thinner overcoat layer.

It is another advantage of the magnetic media hard disk of the present invention that it is fabricated with a denser overcoat layer.

5 It is a further advantage of the magnetic media hard disk of the present invention that it is fabricated with a thinner, denser effective overcoat layer wherein minimal implantation of carbon ions into the magnetic media layer is found.

It is yet another advantage of the magnetic media hard disk of the present invention that it is fabricated with a thinner effective overcoat layer such that a greater areal data storage density can be created with said disk.

10 It is an advantage of the magnetic media hard disk drive of the present invention that it includes one or more magnetic media hard disks of the present invention wherein the data storage within said disk drive is increased.

15 It is another advantage of the hard disk drive of the present invention that it includes one or more magnetic disks of the present invention having a thinner effective overcoat layer, such that the areal data storage density of said hard disk drive may be increased.

It is an advantage of the fabrication process for a magnetic media hard disk of the present invention that a thinner, denser overcoat layer is fabricated with minimal carbon ion implantation into a magnetic media layer of the hard disk.

20 It is another advantage of the fabrication process for a magnetic media hard disk of the present invention that controlled deposition of nitrogen ion species into the overcoat layer may be accomplished.

These and other features and advantages of the present invention will no doubt become apparent to those skilled in the art upon reading the following detailed description which makes reference to the several figures of the drawings.

### **IN THE DRAWINGS**

5 Fig. 1 is a side cross-sectional view depicting a prior art overcoat layer formed by magnetron sputtering fabrication techniques;

Fig. 2 is a side cross-sectional view of a prior art magnetic disk including an overcoat layer that is formed utilizing high energy carbon ion beam fabrication techniques;

10 Fig. 3 is a graphical representation of the implantation of carbon ions of various energy levels into a magnetic layer;

Fig. 4 is a side cross-sectional view depicting a magnetic disk having an overcoat layer that is fabricated utilizing the energy gradient ion beam deposition technique of the present invention;

15 Fig. 5 is a graphical representation of the implantation of 100 eV carbon ions into 20 Å carbon surface layers having different densities; and

Fig. 6 is a schematic top plan view of a hard disk drive including the magnetic disk of the present invention.

### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

20 As is well known to those skilled in the art, a thin film overcoat layer is fabricated upon the magnetic layer of a magnetic media hard disk to provide mechanical and corrosion protection to the magnetic layer. Fig. 1 is a side cross-sectional view of a typical prior art magnetic media hard disk 10 having such an overcoat. As depicted in Fig. 1, the prior art hard disk 10 includes a disk substrate 14 that typically has a plurality of thin film layers deposited thereon. While

various types of prior art hard disks exist, with various numbers and compositions of thin film layers, for the purposes of this disclosure, a typical prior art hard disk 10 can be said to include a at least one underlayer 18 formed upon the surface of the substrate 14, a magnetic layer 26 formed upon the underlayer 18, and an overcoat layer 30 formed upon the magnetic layer 26. As indicated above, the present invention is directed to the features and relationships between the magnetic layer 26 and the overcoat layer 30. In a typical prior art hard disk 10, the magnetic layer 26 is composed of a magnetic material, usually having a CoPtCr composition, that has a thickness of approximately 50 to 200 Å. The overcoat layer 30 is composed of diamond-like carbon (DLC) and is applied utilizing a magnetron sputtering technique having a relatively low application energy that is less than or equal to approximately 10 eV, and the DLC layer 30 is deposited to a thickness of at least approximately 50 Å to 200 Å. It is significant that there is very little implantation of the sputtered carbon ions of the overcoat layer 30 into the magnetic layer 26, due to the low ion energy level of the overcoat layer fabrication technique.

To increase the hard disk data areal storage density, it is desirable to write magnetic data bits closer together in the data track; that is, to increase the number of bits per inch (BPI). To accomplish this, it is desirable to have the magnetic write head positioned closer to the magnetic layer, and decreasing the thickness of the overcoat layer 30 is advantageous in this regard. However, it has been found that if the thickness of the prior art low energy magnetron sputtered overcoat layer 30 is reduced to below approximately 50 Å, both the mechanical protection and corrosion protection of the magnetic layer is adversely affected. A prior art approach to resolve this problem is to apply the overcoat layer 30 utilizing a higher energy ion beam fabrication technique, such that a denser overcoat layer is fabricated than is achieved in the low energy magnetron sputtering process. Where the overcoat layer is denser, a thinner layer will

provide suitable mechanical and corrosion protection to the magnetic layer, and a magnetic hard disk 50 with such a prior art high deposition energy DLC overcoat layer is depicted in Fig. 2.

As depicted in Fig. 2, the prior art magnetic hard disk 50 includes a substrate 14 upon which an underlayer 18 has been deposited, followed by a 200 Å thick magnetic layer 26. The layers 14, 18 and 26 may be identical to those described above with regard to prior art hard disk 10, whereby identical identification numbers are used herein. A DLC overcoat layer 54 that is fabricated in a high energy fabrication process such as mass selected ion beam deposition (MSIB), cathodic arc, laser plasma deposition and plasma enhanced chemical vapor deposition (PECVD) is formed upon the magnetic layer 26. It has been observed that some of the high energy carbon ions that form the overcoat layer 54 penetrate into the magnetic layer 26, forming an ion implanted upper portion 58 of the magnetic layer of approximately 10 Å to 20 Å, as shown by the cross hatched portion 58 of the magnetic layer 26.

A graphical representation of the implantation of carbon ions of various energy levels into a magnetic layer is presented in Fig. 3. More specifically, Fig. 3 depicts an implantation profile 70 for 10 eV carbon ions, wherein the vertical axis ( $I/I_0$ ) represents the quantity of carbon ions and the horizontal axis represents the implantation depth of the carbon ions from the surface (zero) into the magnetic media layer which is composed of a CoPtCr alloy. In like manner, graphical profile 74 represents 50 eV carbon ions, graphical profile 78 represents 100 eV carbon ions and graphical profile 82 represents 500 eV carbon ions. As is seen in Fig. 3, the great majority of 10 eV carbon ions 70 are deposited within the first 5 Å, and nearly all of the 10 eV carbon ions are deposited within the first 8 Å of the magnetic layer. With regard to 100 eV carbon ions 78, a significant portion thereof are deposited in excess of 10 Å. Thus, the



crosshatched portion 58 of magnetic layer 26 of Fig. 2 may be generally as deep as 20 Å for the 100 eV carbon ions.

Significantly, the implanted carbon ions influence the magnetic properties of the magnetic layer portion 58 and degrade its performance. The degraded performance of the ion implanted upper portion 58 of the magnetic layer can be quite significant with regard to overall disk performance, because the upper portion 58 of the magnetic layer 26 contributes significantly to the performance characteristics of magnetic data bits that are written into the magnetic layer. Therefore, the high energy overcoat layer 54 is thinner than the prior art low energy magnetron sputtered layer 30, while still providing good hardness and corrosion resistance; but the magnetic performance properties of the hard disk 50 are somewhat degraded due to the implantation of carbon overcoat layer ions into the magnetic layer 26. The present invention provides an improvement in the prior art overcoat layer technologies by utilizing an ion deposition beam having an energy gradient, such that carbon ion implantation into the magnetic layer is minimized, while the desired thinness and density of the DLC overcoat layer are achieved.

As depicted in Fig. 4, a magnetic media hard disk 100 of the present invention generally includes the substrate 14, underlayer 18 and magnetic layer 26, as are generally known in the prior art and described hereabove with regard to Figs. 1 and 2 above, and a DLC overcoat layer 108 of the present invention that is fabricated on top of the magnetic layer 26. In that the present invention relates generally to the DLC overcoat layer 108, magnetic media hard disks having other, different and additional layers fabricated beneath the magnetic layer 26, as well as various magnetic layer compositions are intended to be included within the scope of the present invention.

As has been indicated above, the overcoat layer 108 of the present invention is thinner and denser than the low energy magnetron sputtered layer 30, and it is fabricated such that carbon ion implantation into the magnetic layer 26 is minimized. To accomplish this, the overcoat layer 108 is fabricated utilizing a device that produces an ion beam that has an ion deposition energy gradient. Specifically, the fabrication of the overcoat layer 108 is commenced with the deposition of an initial overcoat layer portion 112 with a low energy ion beam, such as a 10 to 20 eV ion beam, which is generally the energy level of the low energy magnetron sputtering process of the prior art, as depicted in Fig. 1. Thereafter, as the deposition of the initial overcoat layer portion 112 progresses, the overcoat layer 112 increases in thickness upon the surface of the magnetic layer 26, and due to the relatively low deposition beam energy level, implantation of overcoat layer ions into the magnetic layer 26 is minimized. After the initial overcoat layer thickness is deposited at the low energy level, the energy level of the beam is increased to deposit an intermediate overcoat layer portion 116. The higher energy ions will penetrate more deeply into the surface layer, as has been described hereabove with regard to prior art disk 50; however, because the initial surface layer 112 has been formed of overcoat material, the higher energy overcoat ions penetrate only into the pre-existing initial overcoat layer portion 112. Thus, as the build up of the intermediate overcoat layer portion 116 progresses, the total overcoat layer generally both becomes thicker with overcoat ions that remain on its surface, as well as denser with higher energy overcoat ions that become implanted within the thickness of the initial overcoat layer. Thereafter, a subsequent overcoat layer portion 118 may be deposited with a still higher ion beam energy level. Again, these higher energy overcoat ions penetrate into the surface of the overcoat layer 108. However, due to the thickness of the existing overcoat layer the high energy ions become implanted into both the initial and

intermediate overcoat layer portions and do not penetrate into the magnetic layer 26. A typical DLC overcoat layer density of the present invention is between approximately 2.0 g/cm<sup>3</sup> to approximately 2.9 g/cm<sup>3</sup>.

Fig. 5 is a graphical representation of 100 eV carbon ion implantation into a magnetic disk having surface layers deposited thereon. Specifically, the graphical profile 120 represents the implantation of 100 eV carbon ions into a CoPtCr magnetic layer having no surface layer deposited thereon, and it can be seen that profile 120 is substantially identical to profile 78 of Fig. 3. Profile 124 represents the 100 eV carbon ion implantation into a 20 Å aC:H surface layer having a density of 1.7 grams/centimeter. It can be seen that the great majority of the 100 eV carbon ions are deposited within the 20 Å depth of the surface layer. Graphical profile 128 represents the implantation of 100 eV carbon ions into a 20 Å IBD-C surface layer having a density of 2.2 grams/centimeter, wherein it is seen that nearly all of the 100 eV carbon ions are implanted within the 20 Å IBD-C surface layer. It is therefore to be understood from the graphical representations of Fig. 5 that a sufficiently dense surface layer will prevent the implantation of 100 eV carbon ions into the magnetic layer of a hard disk.

It is therefore to be generally understood that the energy gradient of the ion beam is to be controlled in association with the thickness of the overcoat layer that is being fabricated, such that the highest beam energy levels are utilized when the thickness of the overcoat layer is close to its desired thickness. In this ion beam energy gradient fabrication process the higher energy ions become predominantly implanted into the pre-existing overcoat layer portion, thereby increasing its density, hardness and corrosion resistance, without adding significantly to its thickness, and implantation of ions into the magnetic layer is minimized. Additionally, it is known that the addition of nitrogen ions into the DLC layer can have a positive effect upon its

hardness and corrosion resistance. However, nitrogen ions can also create significant problems if they become implanted into the magnetic layer. Therefore, in an alternative preferred embodiment of the present invention, the initial lower energy overcoat layer fabrication is conducted without nitrogen ions. Thereafter, when an initial low energy overcoat layer has been deposited, nitrogen ions are then included within the higher energy ion beam, to also become implanted within the overcoat layer, rather than into the magnetic layer. A nitrogen enhanced DLC layer is thereby produced in which nitrogen ion implantation into the magnetic layer is minimized.

The present invention has been implemented in a Circulus magnetic media hard disk fabrication device. In this device, the DLC overcoat layer is applied onto the magnetic layer of hard disks utilizing a radio frequency (RF) discharge chamber, which creates an overcoat ion plasma from a gaseous source. In this device, a deposition rate of approximately 10 Å per second is achieved with appropriate input gas concentrations and other control parameters as are well known to those skilled in the art.

To create a DLC overcoat layer of the present invention, acetylene gas was utilized as the carbon ion source. The chamber control parameters were set such that the acetylene gas produced a carbon ion plasma that was directed to the magnetic layer of a hard disk disposed within the chamber. The disk was exposed to an ion beam energy of approximately 10 eV for approximately one second, resulting in an initial carbon overcoat layer having a thickness of approximately 10 Å. Thereafter, the ion beam energy level was increased to approximately 50 eV and the disk was exposed for an additional one second to add an intermediate overcoat layer portion 116, to create an overcoat layer having a thickness of approximately 19 Å. Thereafter, the ion beam energy was increased to approximately 100 eV, and the disk was exposed to the ion

beam for approximately one second, to produce a subsequent overcoat layer portion 118, such that the total overcoat layer 108 has a thickness of approximately 25 Å. In an enhanced overcoat layer deposition process, nitrogen gas can be mixed with the acetylene gas in the second and third deposition energy level steps to create nitrogen ions that are implanted into the overcoat layer. The concentration of nitrogen can be increased as the energy level is increased to create a nitrogen enhanced overcoat layer. A preferred concentration range of nitrogen ions within the overcoat layer is from approximately 2 at. % to approximately 20 at. %.

While the example provided hereabove demonstrates the use of a three step (10 eV, 50 eV, 100 eV) ion beam energy gradient, it is to be understood that the present invention can be practiced utilizing a two step gradient, a multiple step gradient, and a smooth energy gradient. Additionally, ion beam energy levels in excess of 100 eV are contemplated, although there appears to be little advantage to ion beam energy levels in excess of approximately 100 eV. A general principal of the present invention is that the thickness of the DLC layer formed at lower energy levels be sufficient to capture the carbon and nitrogen ions that become implanted at higher energy levels. With the use of appropriate process parameters such as deposition rates and times, as will be understood by those skilled in the art after having read this disclosure, the thickness and density of the overcoat layer can be controlled. Preferred embodiments of the present invention have an overcoat thickness of from approximately 25 Å to approximately 100 Å, with a more preferred upper thickness range of approximately 60 Å, and with a more preferred thickness of approximately 35 Å; the density of the overcoat is between approximately 2.0 g/cm<sup>3</sup> to 2.9 g/cm<sup>3</sup>, and the optional nitrogen concentration is from 2 at. % to 20 at. %

The magnetic disk of the present invention is designed for installation in a hard disk drive, and Fig. 6 is a schematic top plan view of a hard disk drive 200 which includes at least

one, and typically a plurality, of magnetic disks 100 of the present invention. As depicted therein, at least one magnetic head disk 100 is rotatably mounted upon a motorized spindle 204. A slider 208, having a magnetic head 212 disposed thereon, is mounted upon an actuator arm 216 to fly above the surface of each rotating hard disk 100, as is well known to those skilled in the art. The hard disk drive 200 of the present invention thus includes improved features and manufacturing methods for the magnetic disk 100 as have been described hereabove.

While the present invention has been shown and described with reference to certain preferred embodiments, it is to be understood that those skilled in the art will no doubt devise certain alterations and modifications thereto which nevertheless include the true spirit and scope of the present invention. It is therefore intended that the following claims cover all such alterations and modifications in form and detail that nevertheless include the true spirit and scope of the present invention.

What we claim is:

## CLAIMS

1 1. A magnetic media hard disk, comprising:  
2 a substrate;  
3 a magnetic layer;  
4 at least one underlayer being disposed between said substrate and said magnetic layer;  
5 an overcoat layer being disposed above said magnetic layer, said overcoat layer being  
6 comprised of diamond-like carbon (DLC), and wherein carbon atoms of said DLC layer are  
7 generally implanted into said magnetic layer to a depth of less than approximately 10 Å, and  
8 wherein the density of said overcoat layer is between approximately 2.0 g/cm<sup>3</sup> and  
9 approximately 2.9 g/cm<sup>3</sup>.

1 2. A magnetic disk as described in claim 1 wherein the thickness of said overcoat layer is  
2 from approximately 25 Å to approximately 100 Å.

1 3. A magnetic disk as described in claim 1 wherein the thickness of said overcoat layer is  
2 from approximately 25 Å to approximately 60 Å.

1 4. A magnetic disk as described in claim 1 wherein the thickness of said overcoat layer is  
2 approximately 35 Å.

1 5. A magnetic disk as described in claim 1 wherein said overcoat layer includes nitrogen.

6. A magnetic disk as described in claim 5 wherein said overcoat layer includes nitrogen in the range of approximately 2 at. % to approximately 20 at. %.

7. A hard disk drive, comprising:

at least one magnetic media hard disk being adapted for rotary motion upon a disk drive motor spindle;

at least one slider device having a slider body portion being adapted to fly over said magnetic media hard disk;

a magnetic head being formed on said slider body for writing data to said magnetic media hard disk and reading data from said magnetic media hard disk;

said magnetic media hard disk, including:

a substrate;

a magnetic layer;

at least one underlayer being disposed between said substrate and said magnetic layer;

an overcoat layer being disposed above said magnetic layer, said overcoat layer being comprised of diamond-like carbon (DLC), and wherein carbon atoms of said DLC layer are generally implanted into said magnetic layer to a depth of less than approximately 10 Å, and wherein the density of said overcoat layer is between approximately 2.0 g/cm<sup>3</sup> and approximately 2.9 g/cm<sup>3</sup>.

8. A hard disk drive as described in claim 7 wherein the thickness of said overcoat layer is from approximately 25 Å to approximately 100 Å.



1 9. A hard disk drive as described in claim 7 wherein the thickness of said overcoat layer is  
2 from approximately 25 Å to approximately 60 Å.

1 10. A hard disk drive as described in claim 7 wherein the thickness of said overcoat layer is  
2 approximately 35 Å.

1 11. A hard disk drive as described in claim 7 wherein said overcoat layer includes nitrogen.

1 12. A hard disk drive as described in claim 11 wherein said overcoat layer includes nitrogen  
2 in the range of approximately 2 at. % to approximately 20 at. %.

1 13. A process for fabricating a magnetic media hard disk comprising the steps of:  
2 fabricating a magnetic media layer upon a surface material of a substrate;  
3 fabricating a diamond-like carbon (DLC) layer upon said magnetic layer, including the  
4 steps of:

5 fabricating an initial thickness DLC layer portion upon said magnetic layer  
6 utilizing a relatively low ion carbon beam energy;

7 fabricating a subsequent thickness DLC layer portion upon said initial thickness  
8 DLC layer portion utilizing a relatively high carbon ion beam energy.

1 14. A process for fabricating a magnetic media hard disk as described in claim 13 wherein  
2 said relatively low carbon ion beam energy is approximately 10 eV to approximately 20 eV.

1 15. A process for fabricating a magnetic media hard disk as described in claim 14 wherein  
2 said relatively high ion beam energy is approximately 100 eV.

1 16. A process for fabricating a magnetic media hard disk as described in claim 13, including  
2 the further step of fabricating an intermediate thickness DLC layer portion between said initial  
3 DLC layer portion and said subsequent DLC layer portion, wherein said intermediate thickness  
4 DLC layer portion is fabricated utilizing a relatively mid-range carbon ion beam energy between  
5 said relatively low carbon ion beam energy and said relatively high carbon ion beam energy.

1 17. A process for fabricating a magnetic media hard disk as described in claim 16 wherein  
2 said intermediate carbon ion beam energy is approximately 50 eV.

1 18. A process for fabricating a magnetic media hard disk as described in claim 17 wherein  
2 said DLC layer has a thickness of approximately 10 Å following the deposition of said initial  
3 thickness DLC layer portion, and said DLC layer has a thickness of approximately 19 Å  
4 following the deposition of said intermediate thickness DLC layer portion, and said DLC layer  
5 has a final thickness of approximately 25 Å following the deposition of said subsequent  
6 thickness DLC layer portion.

1 19. A method for fabricating a magnetic media hard disk as described in claim 18 wherein  
2 said DLC layer is formed with a density of approximately 2.0 g/cm<sup>3</sup> to approximately 2.9 g/cm<sup>3</sup>.

1 20. A method for fabricating a magnetic media hard disk as described in claim 13 wherein  
2 nitrogen ion species are deposited within said subsequent thickness DLC layer portion.

1 21. A process for fabricating a magnetic media hard disk as described in claim 20 wherein  
2 said nitrogen species are deposited in a range of approximately 2 at. % to approximately 20 at.  
3 %.

1 22. A method for fabricating a magnetic media hard disk comprising the steps of:  
2 fabricating a magnetic material layer upon a material surface of a substrate;  
3 fabricating a diamond-like carbon (DLC) layer upon said magnetic layer, wherein said  
4 DLC layer is fabricated in the steps of:  
5 depositing carbon ion species upon said magnetic layer utilizing a relatively low  
6 carbon ion beam energy of from approximately 10 eV to approximately 20 eV, to deposit an  
7 initial DLC layer thickness;  
8 subsequently increasing the carbon ion beam energy level as the thickness of said  
9 DLC layer increases due to deposition of carbon ion species within said DLC layer, such that  
10 higher energy carbon ion beam species become implanted within said DLC layer thickness.

1 23. A method for fabricating a magnetic media disk as described in claim 22 wherein said  
2 carbon ion beam energy level is varied smoothly with time.

1 24. A method for fabricating a magnetic media hard disk as described in claim 22 wherein  
2 said carbon ion beam energy level varies as a step function with time.

1 25. A method for fabricating a magnetic media hard disk as described in claim 23 wherein  
2 nitrogen ion species are implanted within said DLC layer thickness.

1 26. A method for fabricating a magnetic media hard disk as described in claim 25 wherein  
2 said nitrogen ion species are included within said DLC layer in a range of approximately 2 at. %  
3 to approximately 20 at. %.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218

## ABSTRACT

### ENERGY GRADIENT ION BEAM DEPOSITION OF CARBON OVERCOATS ON RIGID DISK MEDIA FOR MAGNETIC RECORDINGS

In the energy gradient ion beam deposition technique of the present invention, the  
5 fabrication of the overcoat layer starts with a low energy ion beam to avoid magnetic layer  
implantation problems, followed by higher deposition energies where the higher energy atoms  
are implanted into the previously formed lower energy overcoat layer, rather than the magnetic  
layer. The energy gradient ion beam deposition process therefore results in a thin overcoat layer  
that is denser than a comparable layer formed by low energy magnetron sputtering, and which  
10 overcoat layer provides good mechanical and corrosion protection to the magnetic layer, without  
degrading the magnetic properties of the magnetic layer. Where a magnetic media hard disk of  
the present invention is utilized within a hard disk drive, the thinner overcoat layer allows the  
magnetic head of the disk drive to fly closer to the magnetic media layer, thereby facilitating an  
15 increase in the areal data storage density of the hard disk drive.

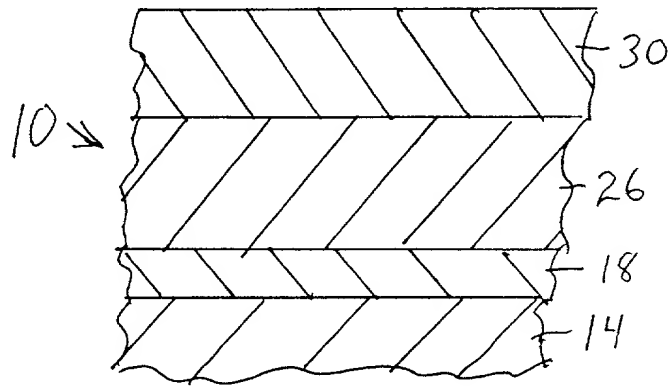


FIG. 1

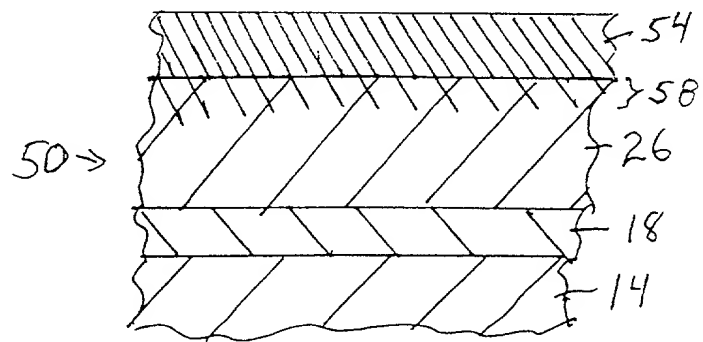


FIG. 2

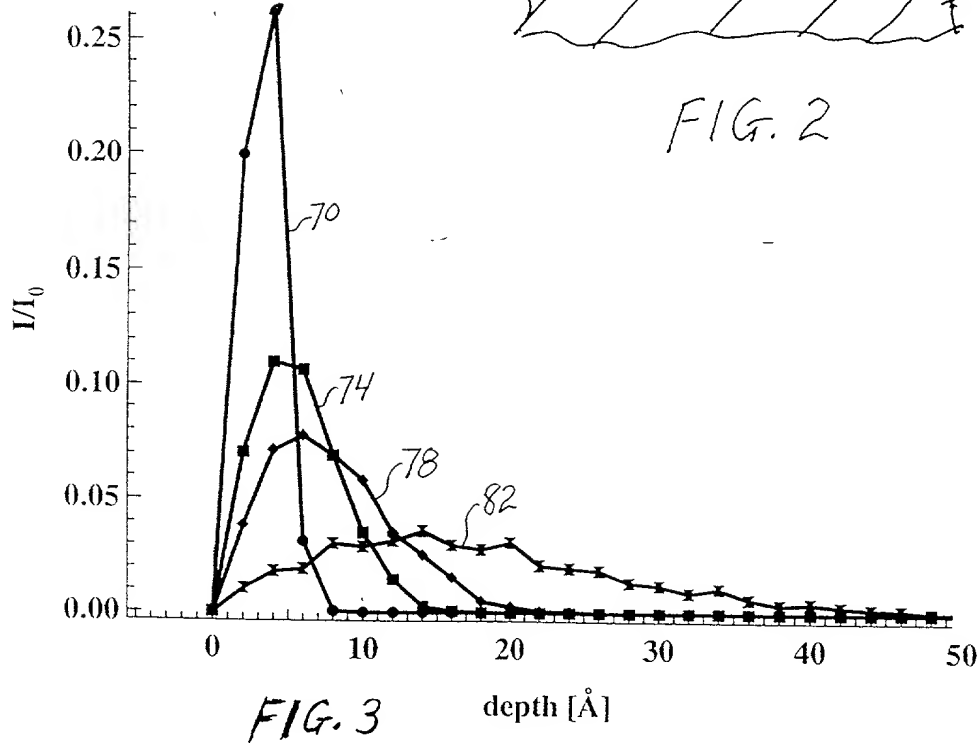


FIG. 3

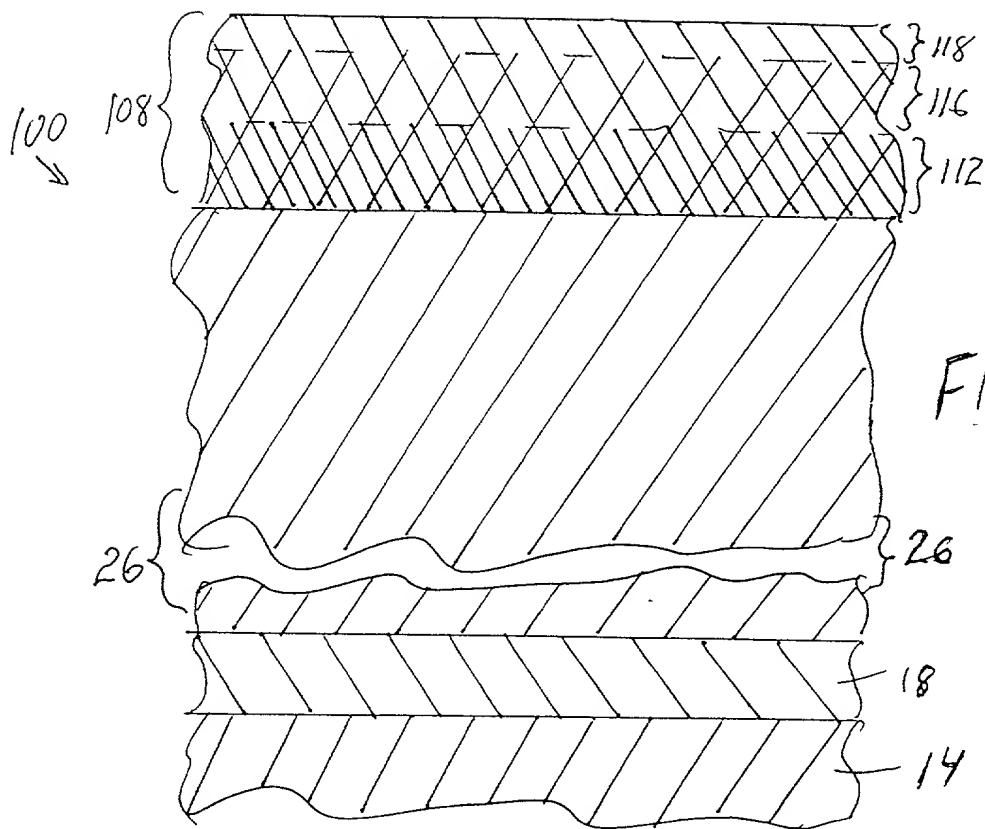


FIG. 4

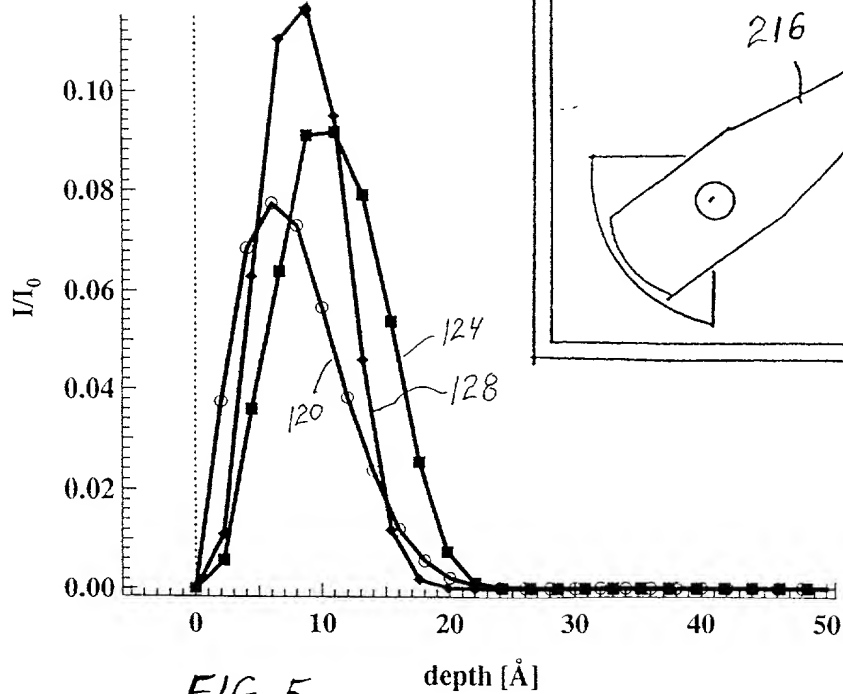


FIG. 5

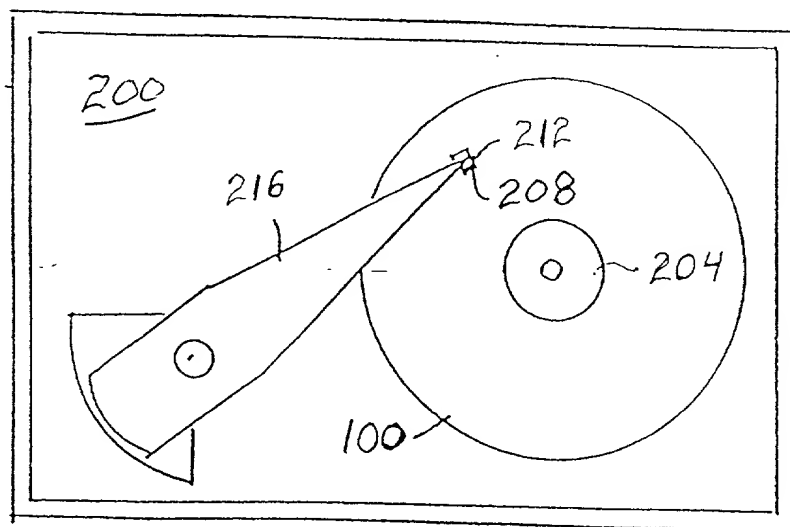


FIG. 6

**DECLARATION, POWER OF ATTORNEY AND PETITION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"Energy Gradient Ion Beam Deposition of Carbon Overcoats on Rigid Disk Media for Magnetic Recordings"** the specification of which

(check one) ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application of which priority is claimed.

**Prior Foreign Application(s)**

Priority Claimed

	Yes	No
(Number)(Country)(Day, month, year filed)	Yes	No
(Number)(Country)(Day, month, year filed)	Yes	No
(Number)(Country)(Day, month, year filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	Filing Date	(Status: Patented, pending, abandoned)
(Application Serial No.)	Filing Date	(Status: Patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint W. POMS, REG. 18,782; G.P. SMITH, REG. 20,142; G. E. LANDE, REG. 22,222; A.C. ROSE, REG. 17,047; L.J. BOVASSO, REG. 24,075; C. BERMAN, REG. 29,249; D.J. OLDENKAMP, REG. 29,421; C. DARROW, REG. 30,166; M.E. HARRIS, REG. 26,690; K.A. MACLEAN, REG. 31,118; C. ROSENBERG, REG. 31,464; M.E. BROWN, REG. 28,590; S.R. HANSEN, REG. 38,486; D.N. LARSON, REG. 29,401; J.W. INSKEEP, REG. 33,910; H.D. JASTRAM, REG. 19,777; B. CANTER, REG. 34,792; C.J. LERVICK, REG. 35,244; L. CULLMAN, REG. 39,645; C.A.S. HAMRICK, REG. 22,586; R.O. GUILLOT, REG. 28,852; J. BOYCE, REG. 40,920; C. CHOU, REG. 41,672; A.B. DIEPENBROCK, REG. 39,960; M.K. BOSWORTH, REG. 28,186; L. SHERRY, REG. 43,918; L. McROSS, REG. 40,427; E.E. KLEIN, REG. 34,337;



P. SABER, REG. 37,494; E.A. PENNINGTON, REG. 32,588; J.C. REDMOND, JR., REG. 18,753; R.B. MARTIN, REG. 26,945; R.J. BLUESTONE, REG. 40,518; D.R. MILLETT, REG. 31,784; C.A. HUGHES, REG. 26,914; J.E. HOEL, REG. 26,279; OPPENHEIMER WOLFF & DONNELLY LLP, 1400 Page Mill Road, Palo Alto, California 94304, (650) 320-4000, as my attorneys with full power of substitution and revocation, to prosecute said application and to transact in connection therewith all business in the Patent and Trademark Office and before competent International Authorities.

Address all telephone calls to Robert O. Guillot at (650) 320-4000, and address all correspondence to:

Robert O. Guillot, Esq.  
**OPPENHEIMER WOLFF & DONNELLY LLP**  
 1400 Page Mill Road  
 Palo Alto, CA 94304

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

Full Name of Sole or First Inventor: Daryl J. Pocker

Home Address: 1123 Petroni Way, San Jose, CA 95120

Post Office Address: Same as above

Citizenship: United States

Inventor's Signature:  Date: Nov. 16, 2000

Full Name of Second Inventor: Jan-Ulrich Thiele

Home Address: 806 Coleman Avenue #5, Menlo Park, CA 94025

Post Office Address: Same as above

Citizenship: Germany


Inventor's Signature:  Date: Nov. 17, 2000

Full Name of Third Inventor: Richard L. White

Home Address: 928 Clinton Road, Los Altos, CA 94024

Post Office Address: Same as above

Citizenship: United States

Inventor's Signature:  Date: Nov 16, 2000

Full Name of Fourth Inventor: Bing K. Yen

Home Address: 5583 Blossom Garden Circle, San Jose, CA 95123

Post Office Address: Same as above

Citizenship: United States

Inventor's Signature: B. K. Yen Date: Nov. 17, 2000